

High Wall Heat Pump Ductless System



Indoor Model: **619PHAQ09XA3**


Submittal Data

Job Data: Location:

Buyer: Buyer P.O. #: Carrier #:

Unit Number: Model Number:

Performance Data Certified By: Date:

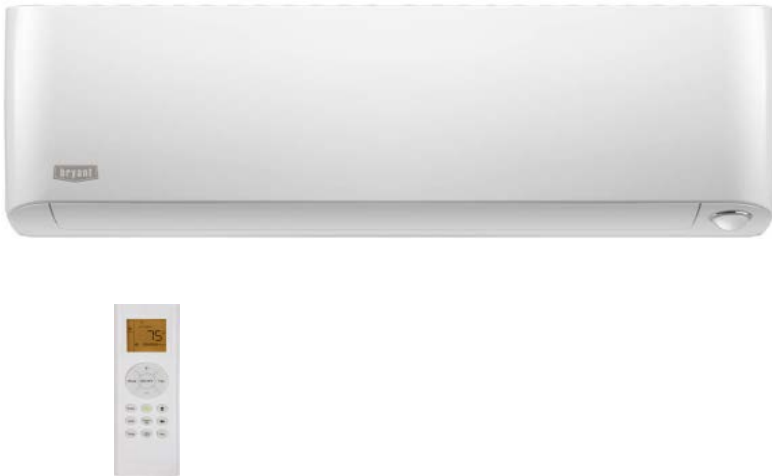

STANDARD FEATURES

- Modes: Cool, Heat, Smart Dry, Fan, Auto
- Turbo Mode
- Fully Modulating fan speeds
- Sleep Mode
- Up-Down / Right-Left Louver control (fixed or swing)
- Built in Relative Humidity Sensor
- Built in occupancy sensor
- ECO Mode
- Carbon Filter
- Follow Me (senses temperature at handheld remote)
- Heating Setback (46° F Heating Mode)
- Aluminum Golden Hydrophilic pre-coated fins

Controls:

- Wi-Fi Built-in
- Wireless Remote Controller included with indoor unit
- Wired Remote Controller KSACN0401AAA (7 Day programmable) (Optional)

LIMITED WARRANTY*

- 10 year limited to original purchaser on compressor and parts upon timely registration, otherwise 5 years
- *For residential applications. See warranty for full details.

System	Size	9	
	Indoor Model	619PHAQ09XA3	
Electrical	Voltage, Phase, Cycle	V/Ph/Hz	208/230-1-60
	Power Supply	208/230-1-60	
	MCA	A.	0.3
Controls	Wireless Remote Controller (°F/°C Convertible)	Standard	
	Wired Remote Controller (°F/°C Convertible)	Optional	
Operating Range	Cooling Indoor DB Min -Max	° F (° C)	62~90 (17~32)
	Heating Indoor DB Min -Max	° F (° C)	32~86 (0~30)
Piping	Pipe Connection Size - Liquid	in (mm)	1/4 (6.35)
	Pipe Connection Size - Suction	in (mm)	3/8 (9.52)

Indoor Coil	Face Area (sq. ft.)	Sq. Ft.	2.2	
	No. Rows	4		
	Fins per inch	21		
	Circuits	5		
Indoor	Unit Width	in (mm)	35.2 (895)	
	Unit Height	in (mm)	11.7 (298)	
	Unit Depth	in (mm)	9.8(248)	
	Net Weight	lbs (kg)	37.48 (17)	
	Number of Fan Speeds		4	
	Airflow (lowest to highest)	CFM	144/245/295/345	
	Sound Pressure (lowest to highest)	dB(A)	29/35.5/41.5/45.6	
	Air throw Data	ft (m)	21.98 (6.7)	
	Moisture removal	Pint/h (L/h)	2.11 (1.0)	
Field Drain Pipe Size O.D.	in (mm)	1 (25.4)		

Performance may vary based on the outdoor unit matched to. See compatible outdoor units pages for Performance Data.
For Compatibility See Product Data

Accessories

53DS-900---118	Condensate Pump
KSACN0401AAA	Wired Remote Control 7 Day Programmable
KSAIC0101230	24V Interface Kit 230V
53DS-900---089	Insulated 25' Line Set - 1/4" x 3/8"

